

TECHNICAL FEATURES

DOORBLADE

Seamless fiberglass encapsulating a non-organic, high density polyisocyanurate foam core. Total thickness 40mm. Moisture absorption zero.

SIZES

Molded in 11 standard widths and four heights. Also available for special order in any non-standard height.

FRAMES

- Available in 4 frame types: GRP, SS, Aluminium or Powder Coated Steel.
- Seamless glass reinforced polyester with insert for screw fixing direct to structure.
- Satin anodised or powder coated white adjustable width aluminium frame, incorporating a neoprene seal for screw fixing to a sub frame.
- Alternative stainless steel frames for fixing to installation panel and blockwork. Doors can be supplied for fixing to clients' own frames.

FINISH

- Easy to clean, maintenance free, smooth, non porous, gelcoat surface with built-in choice of 20 colours.
- Available with antibacterial protection.
- Designed to withstand all typical cleaning methods including hydrogen peroxide.

OPTIONS


- Factory-fitted hardware and door protection.
- Flush vision panels with integral blinds, smart glass or x-ray and laser protection.
- Automations & Interlocking.

GENERAL

- Doors are supplied pre-hung & fully fitted-out for easy site installation.

Hygienic Hinged Doors

Architectural Details

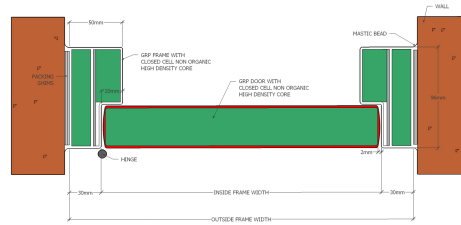

Left hand hung blade, fixed to GRP frame

Side section, fixed to GRP frame detail

Right hand hung blade, fixed to Stainless Steel frame



Seamless GRP Door Panel

Optional Flush Vision Panel

Factory-fitted Hardware